


GREAVES



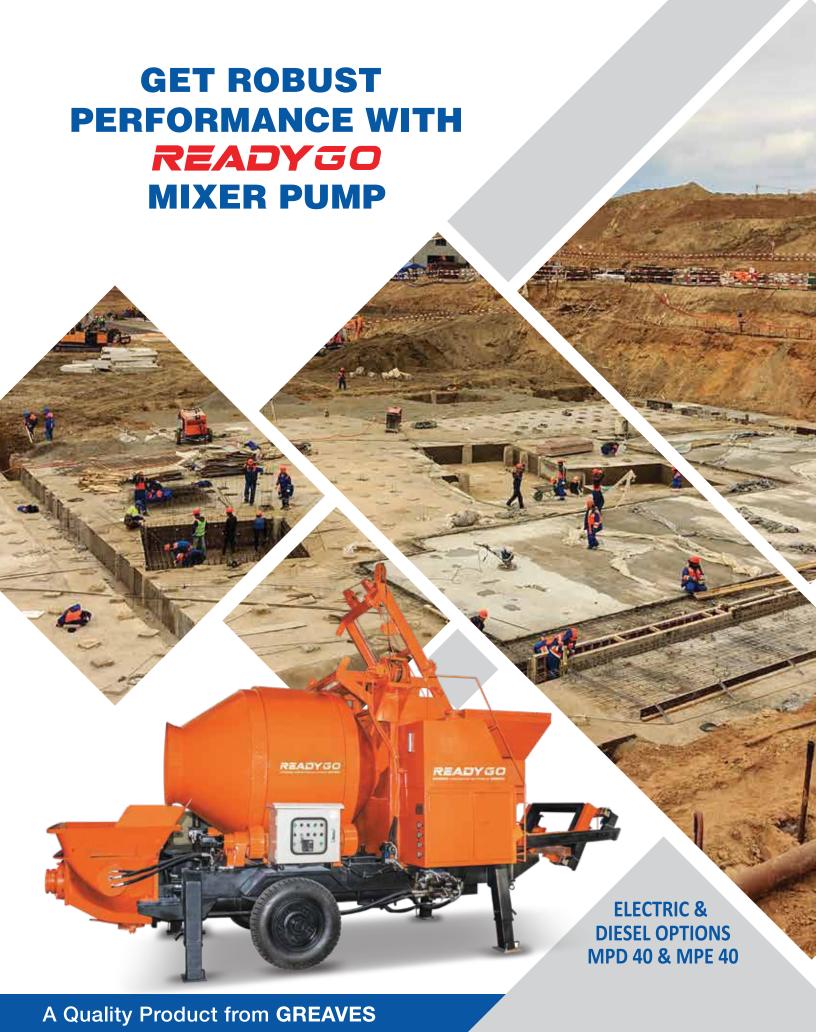

READYGO MIXER PUMP BY GREAVES Durability, Reliability, Assurance

MODEL	MPD40 (DIESEL)	MPE40 (ELECTRIC)
PERFORMANCE SPECIFICATIONS		
Concrete Output - rod side (cu.m/hr)	40	40
Concrete Pressure - rod side (theoretical) (bar)	80	80
TECHNICAL SPECIFICATIONS		
Concrete Delivery Cylinder (diam x stroke) (mm)	200 x 800	200 x 800
Hydraulic Cylinder (bore x rod x stroke) (mm)	90 x 65 x 800	90 x 65 x 800
Strokes/min - rod side (count)	23	18
Hopper Capacity (ltr)	600	-
Engine Power (kW)	60	-
Hydraulic System Pressure (bar)	280	280
Rated Voltage (V)	-	415
Main Motor Power (kW)	-	37
Vibrating Motor Power (kW)	-	0.5
DIMENSIONAL SPECIFICATIONS		
Length (mm)	5800	4100
Width (mm)	2100	2100
Height (mm)	3800 (3200)	3800 (3200)
Weight (max.) (mm)	5800	3500

i) Values are theoretical ii) Tolerances apply iii) Product updation is a continous process. Please contact ReadyGo for latest information

STAND-OUT FEATURES



Two-in-one Mix Pump solution



PLC-based system





Ideal for longer working hours



Sturdy mixer rollers



Versatile & mobile







*T&C Apply

*Due to continuous improvement in product, technical specifications may change without any prior notice

GREAVES COTTON LIMITED

Unit No. 1A, 5th Floor, Tower 3, Equinox Business Park, LBS Marg, Kurla (W) Mumbai - 400070. Phone: +91 22 41711700 Authorized Dealer:

E CONCRETE TECHNOLOGY

102/1, West Agargaon (7th Floor), Sher-E-Banglanagar, Dhaka 1207. Cell: 01614-099906,07,10; info@concretetechnology.com.bd





